

CHIMNEY CAP MEASURE / INSTALL FORM

JOB NAME _____ BILL TO: _____

SIDING _____ STUCCO _____ MASONRY _____

3" STAINLESS NEOPRENES 3" STAINLESS NEOPRENES 1-1/4"-3" TAPCONS

5/16" NUT DRIVER 5/16" NUT DRIVER 1/4" NUT DRIVER
5/16" NUT DRIVER

NP-1 COLOR ?
RIVETS & RIVET GUN

MASONRY BITS

***NOTE - USE STAINLESS SCREWS WITH COPPER CAPS.
ALWAYS DOUBLE CHECK MEASUREMENTS.


TURN UP : _____

SPARK ARRESTOR
HEIGHT: _____

TURN DOWN : _____

DIAMETER: _____

ROOF PITCH : _____

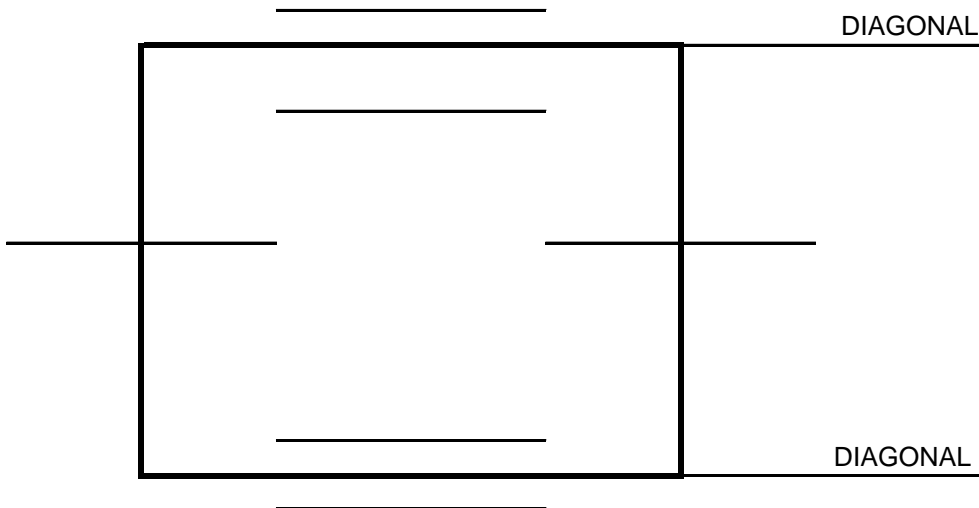

FLUE TYPE: _____

STORM COLLAR SIZE _____ X _____

TYPE OF TILE _____

COUNTER CAP SIZE _____ X _____

TILE ON CAP _____

NOTE : TURN DOWN TO EXTEND TO BOTTOM OF TOP BAND WHEN POSSIBLE.
BE AWARE OF STRETCH-OUT WHEN CONSIDERING TURN DOWN.

DOES IT NEED A WOODEN FRAME ? (LARGE TURNDOWN ? / LARGE CHASE ?)

PULL SAG OUT OF BASE CAP BEFORE SETTING SCREW IN FLUE PIPE

CHIMNEY CAP MEASURE SHEET